
Henry Quick

(HEC.100)



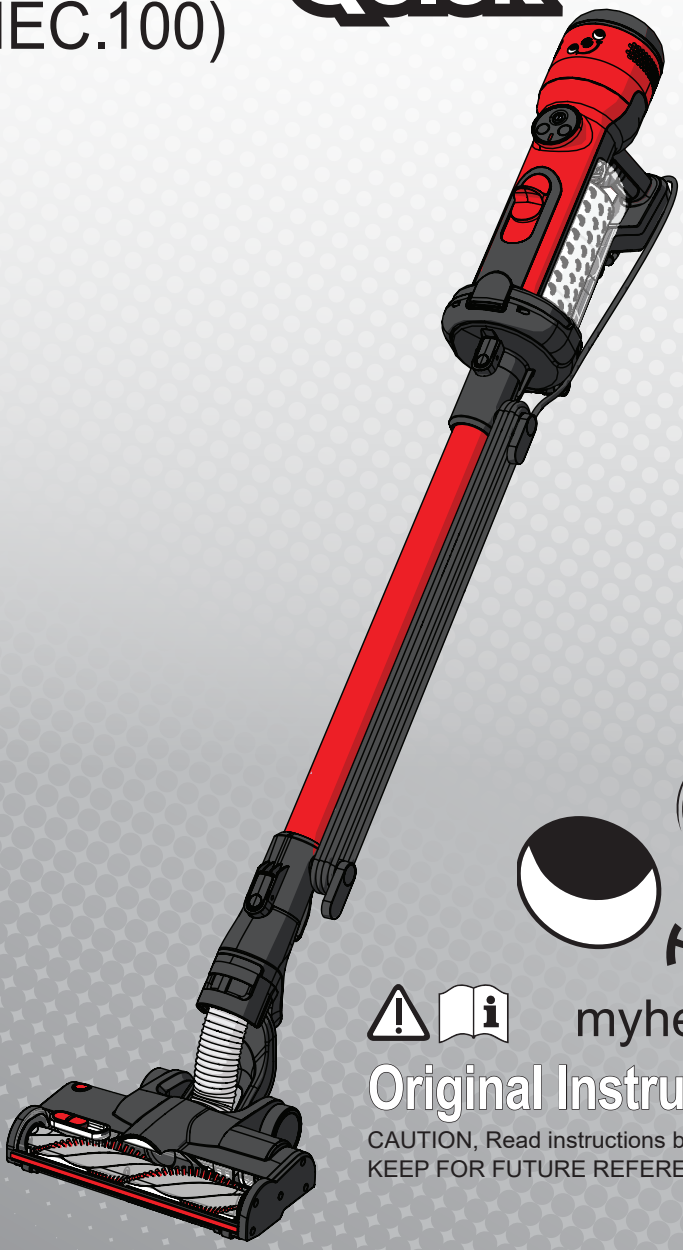



myhenry.com


Original Instructions

CAUTION, Read instructions before using the machine
KEEP FOR FUTURE REFERENCE

1	Filter Cover	Page 11
2	Filter	Page 11
3	Power Cord	Page 7
4	Control Panel	Page 6
5	Lid Release / Pod Eject	Page 8 & 9
6	Filter Pod / Tank	Page 8 & 9
7	Lid Catch	Page 8 & 9
8	Release Button	Page 4 & 8
9	Cable Hooks	Page 7
10	Wand Section	Page 4
11	Hose Release	Page 12
12	Hose	Page 12
13	Brush Release Button	Page 10
14	Brush Release Panel	Page 10
15	Suction Control	Page 8
16	Brush Roll	Page 10

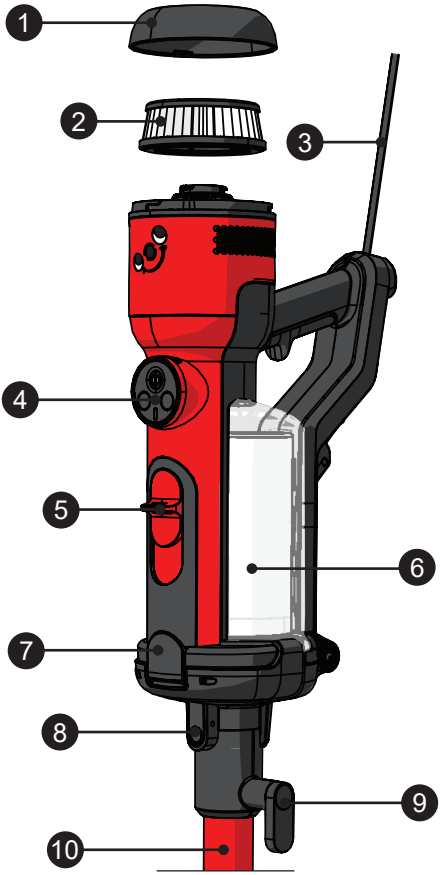


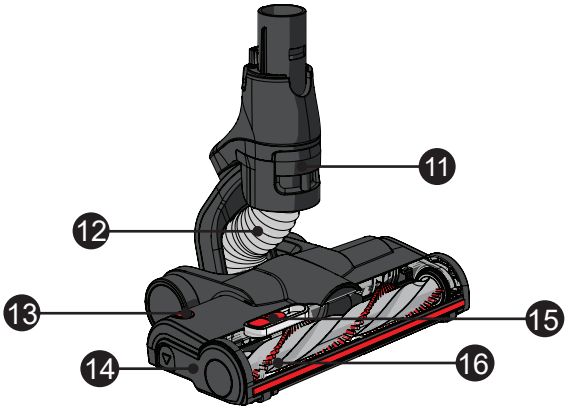

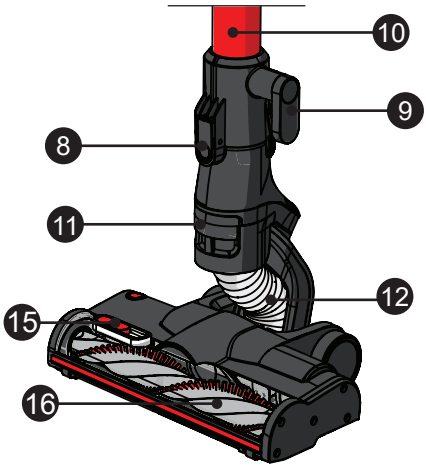




What's in the Box

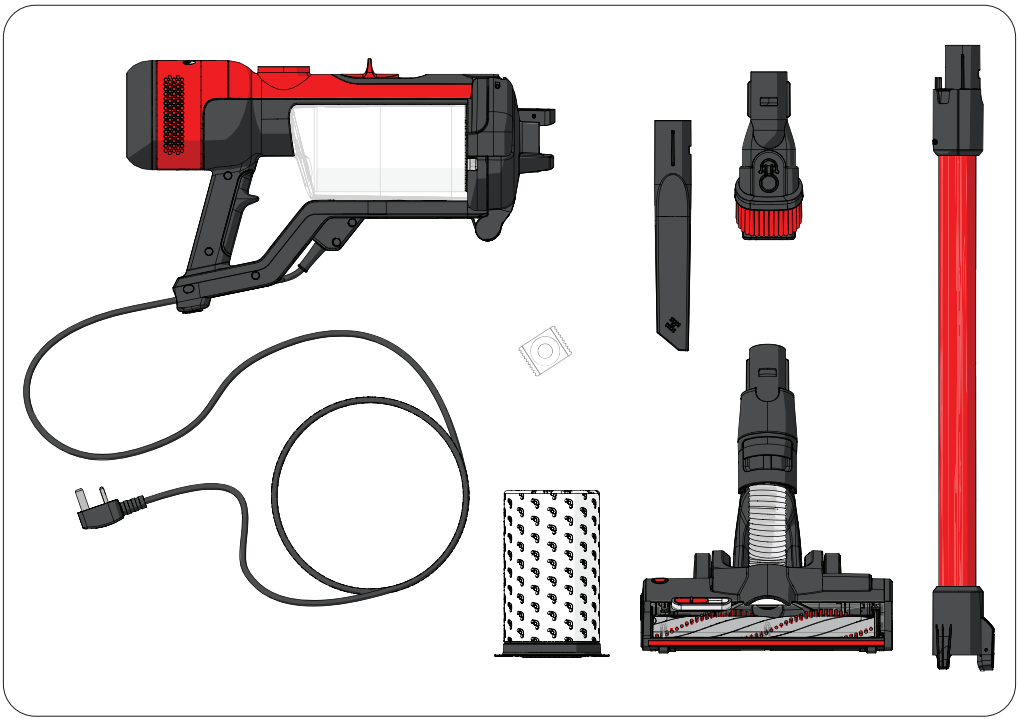

Spares and Accessories


919644	HEC.260 Henry Quick Corded Floor Tool
920662	Henry Quick Corded Brush Roll Assembly
919645	Henry Quick Corded Wand
920098	Henry Quick Corded Post-Motor Filter
915744	Pack of 10 Filter Pods
914593	Vanilla Scent Pods
915350	Passionfruit Scent Pods
915674	Rose Scent Pods


For spares and accessories visit **myhenry.com**




WARNING: Henry Quick Corded parts and replacements are not compatible with Henry Quick Cordless. Any attempt to interchange parts or use non genuine Henry Quick Corded parts can be detrimental to both the machine performance and life; this may also invalidate the warranty. These parts include, but are not limited to all the parts listed under spares and accessories above.



Use tools with or without the wand
Click!
Click!
Click!
Release

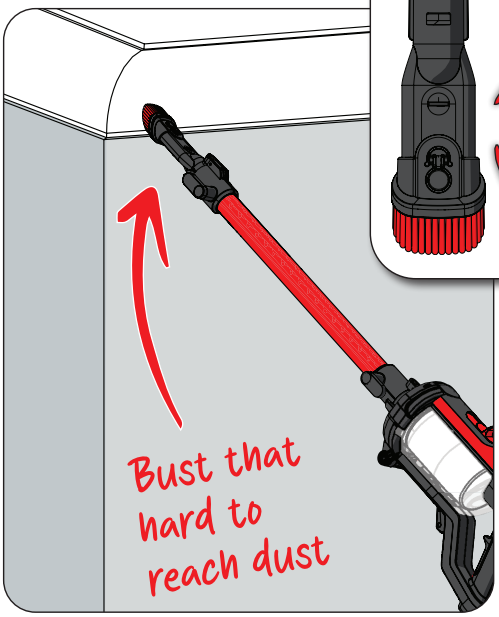

Bust that
hard to
reach dust





A tool for
every job

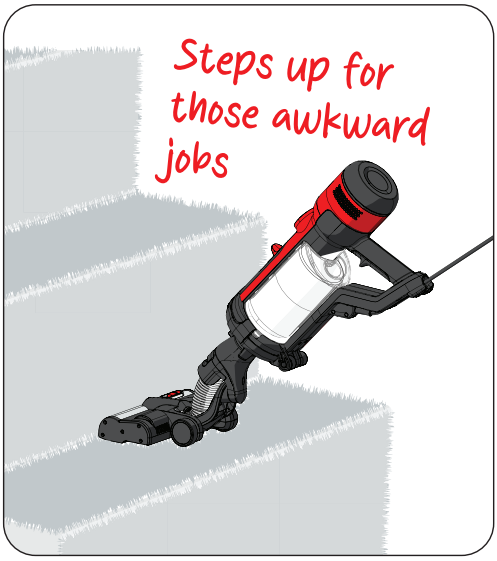

Steps up for
those awkward
jobs

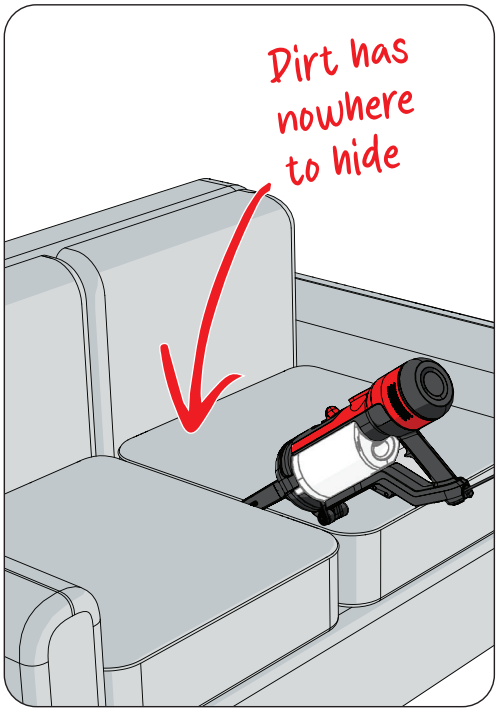
Dirt has
nowhere
to hide

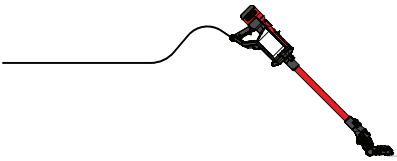


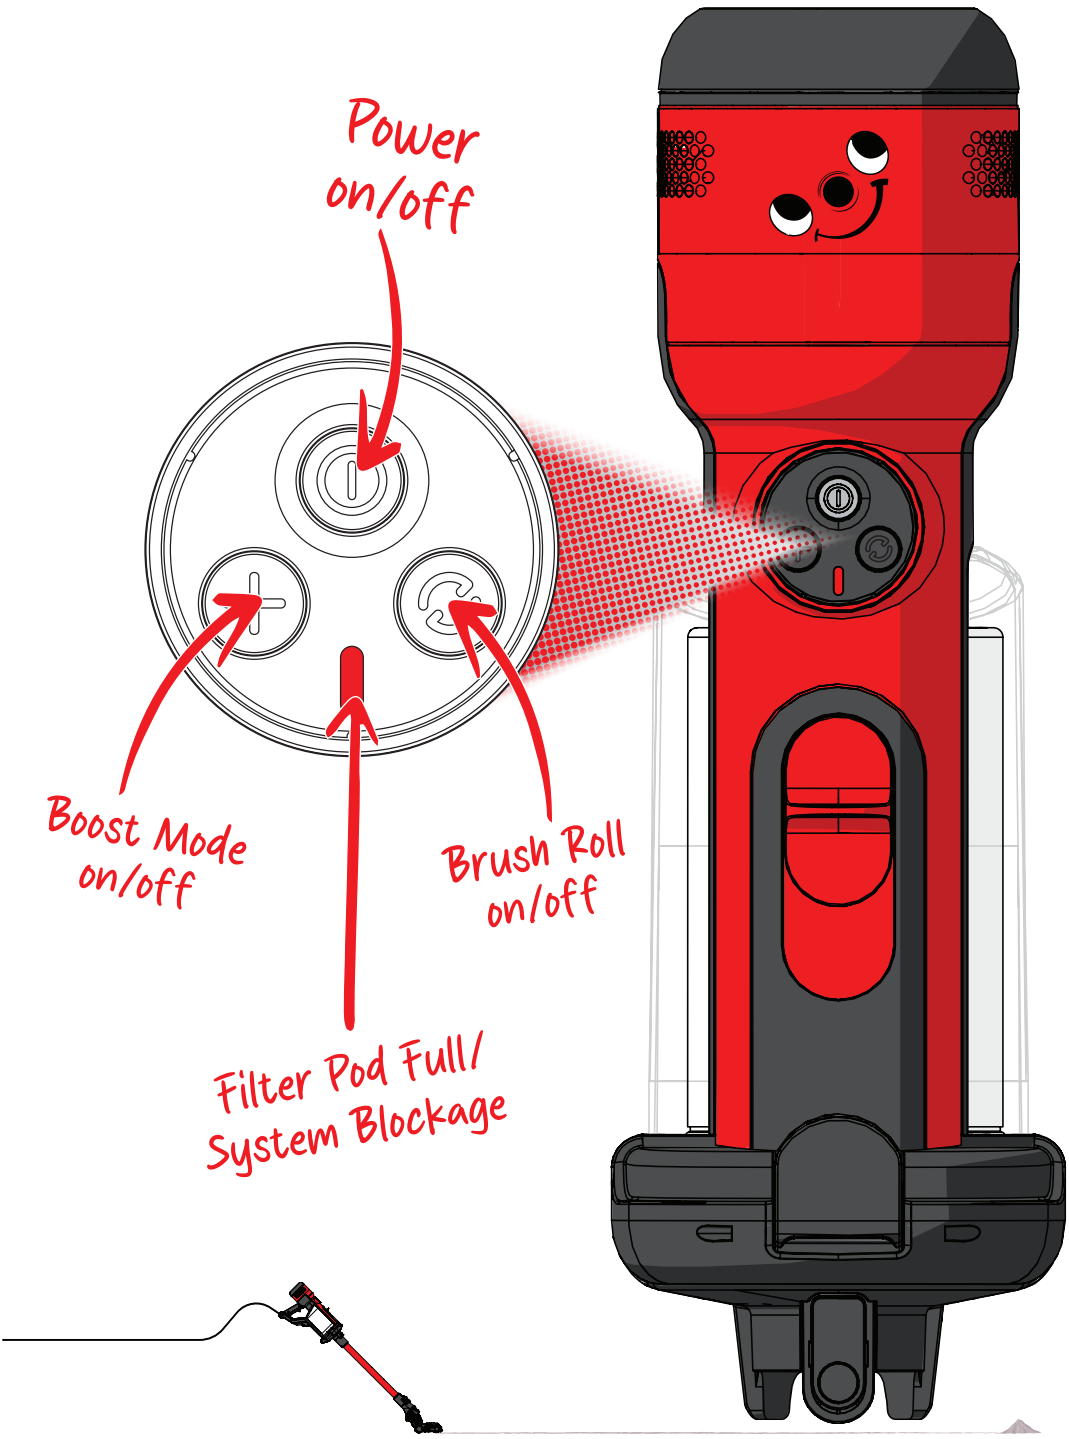
Power
on/off
Boost Mode
on/off
Brush Roll
on/off
Filter Pod Full/
System Blockage


Cable Tidy

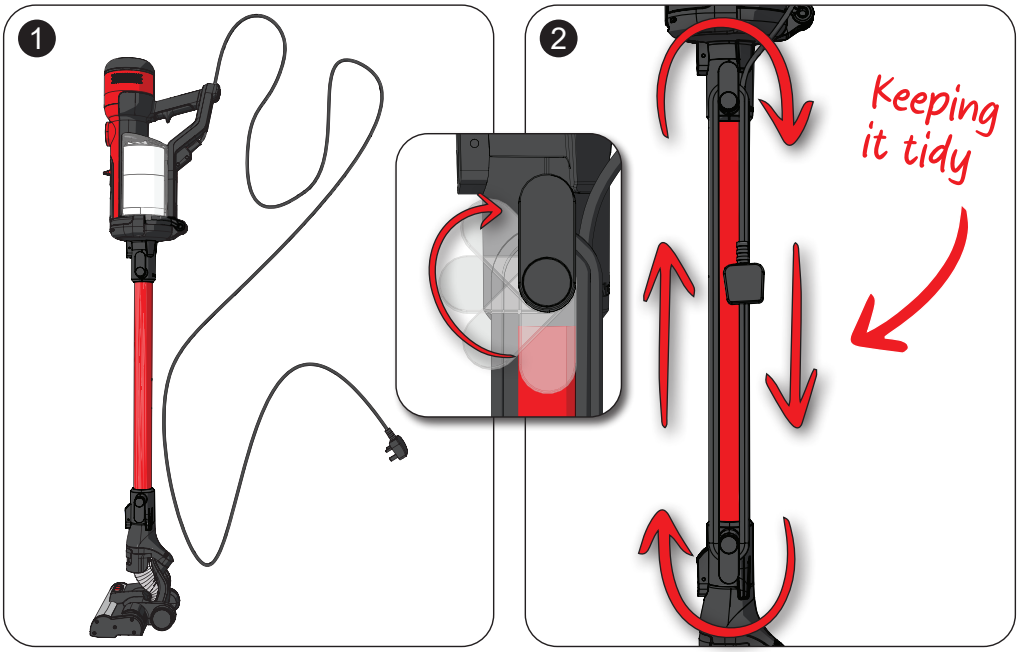


Cable Release

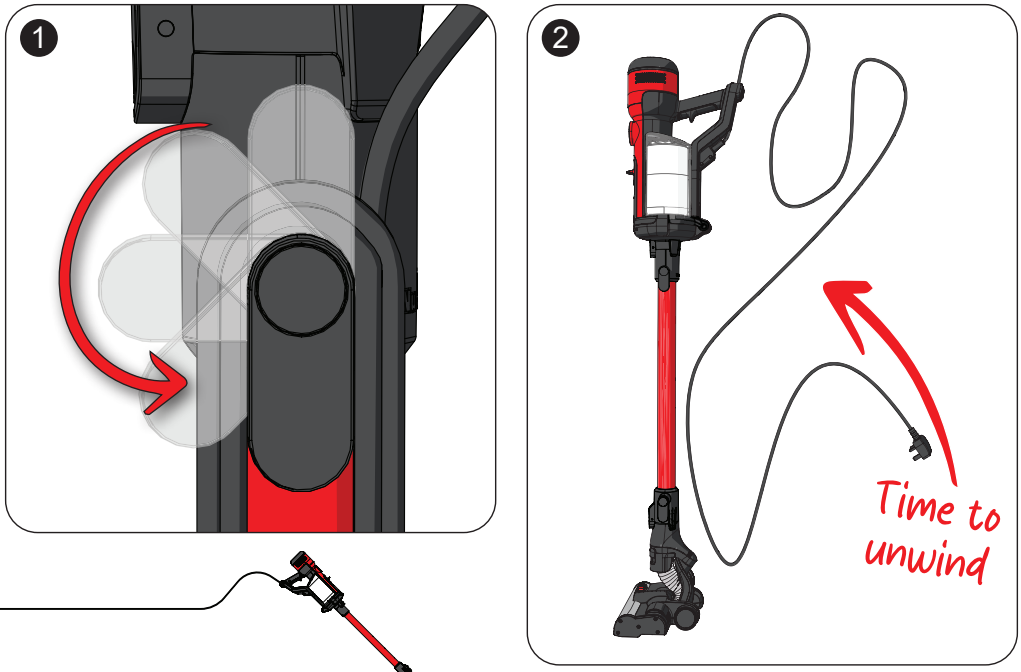


Suction Control

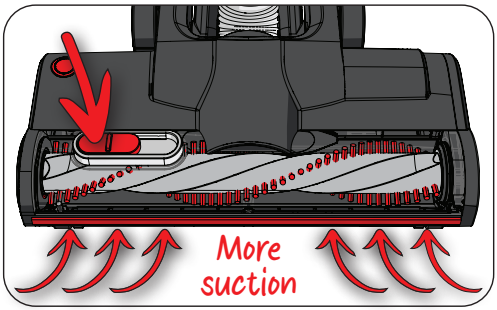

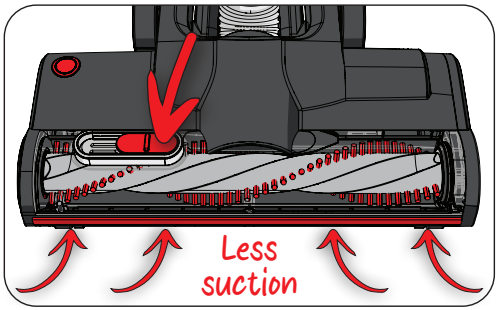


Changing your Pod

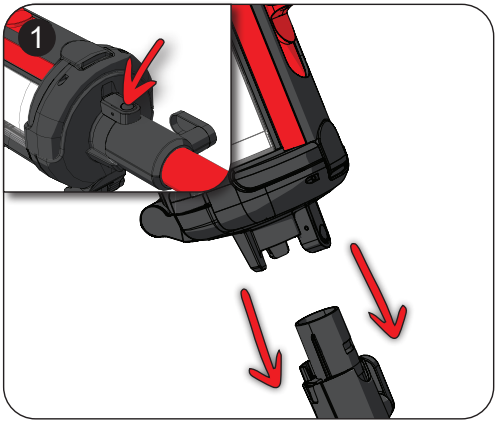








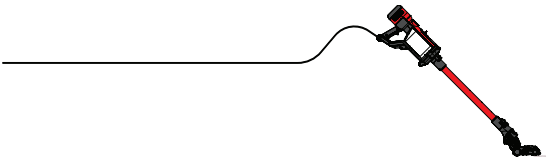


5




Smells so good



6

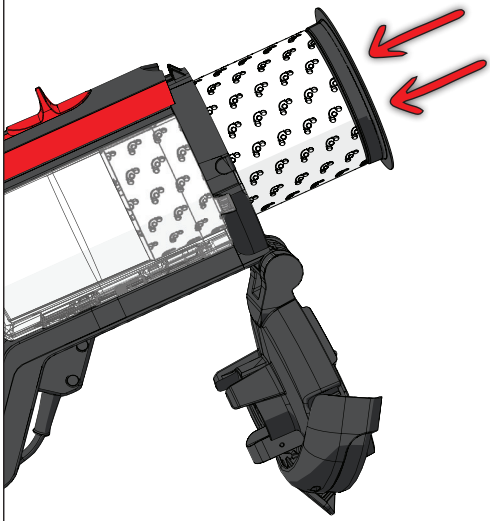


7

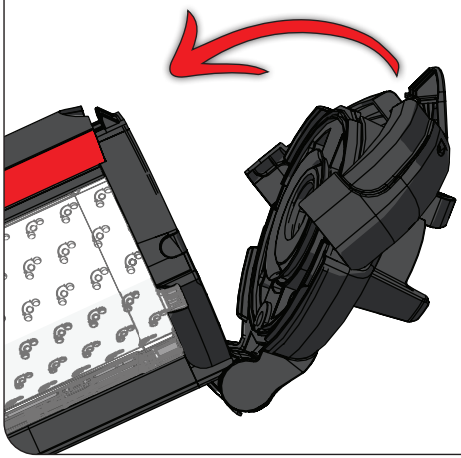


8


Click!

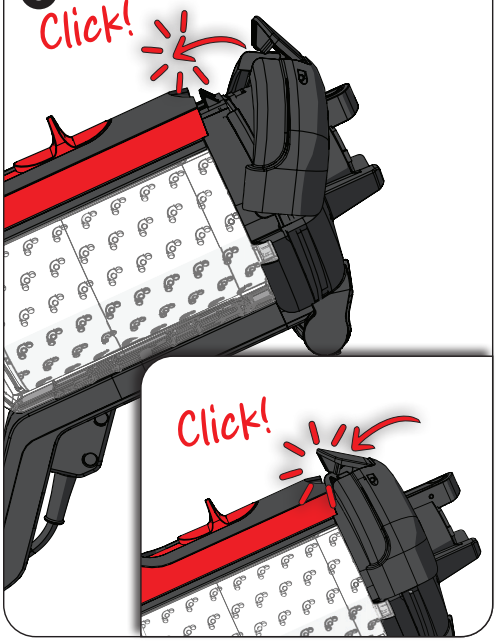



Click!

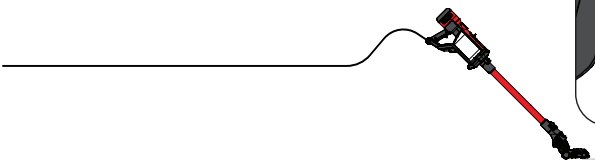



Cleaning the Brush Roller

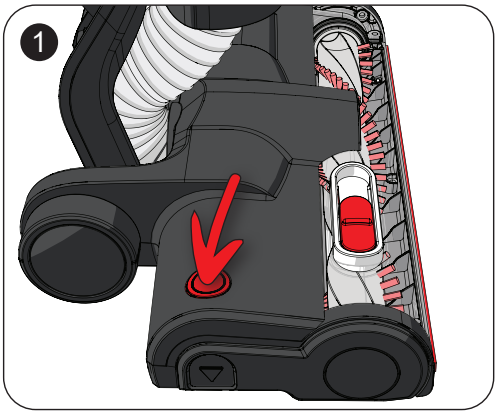


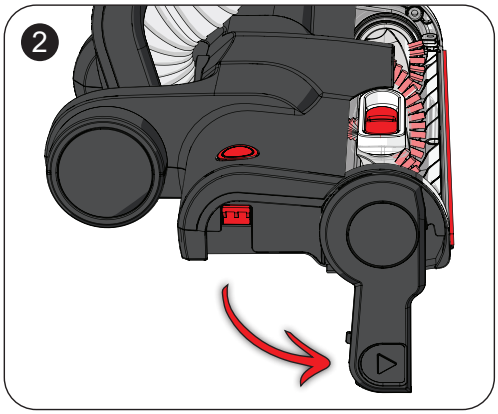

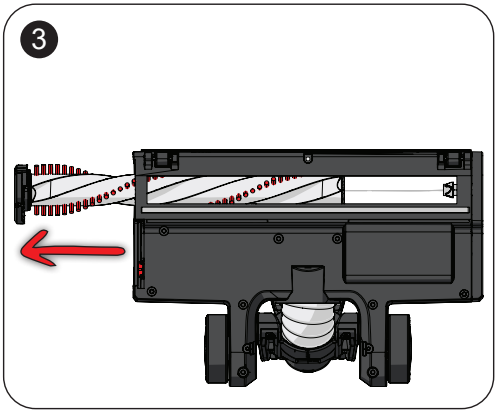

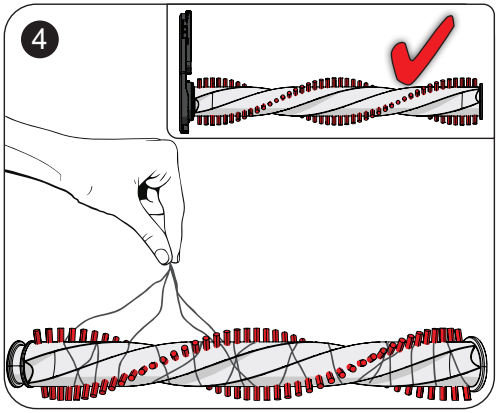

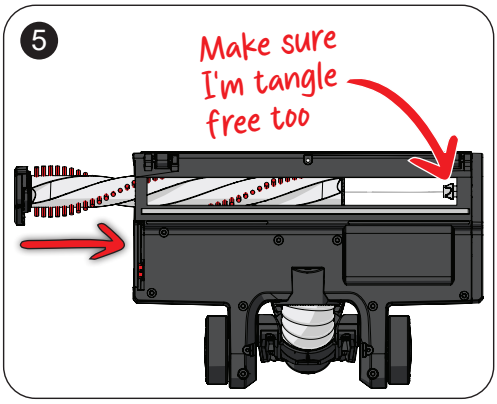

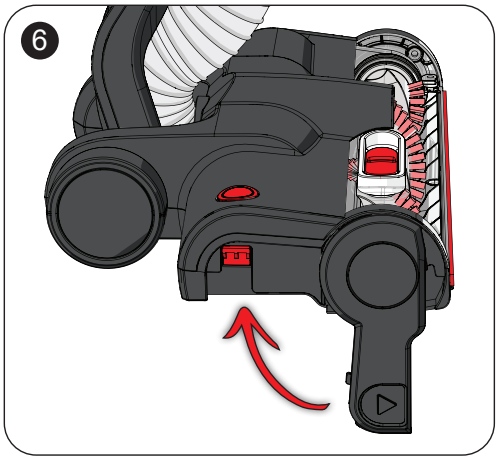






1


2


3

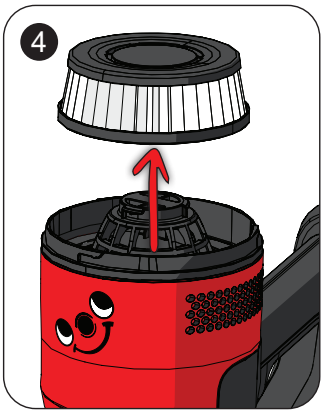
4



5
I'm not washable
Replace me with a Genuine Henry filter

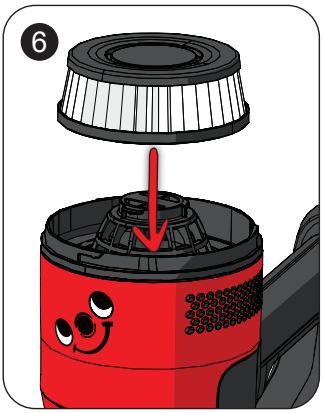

6



7



8



9

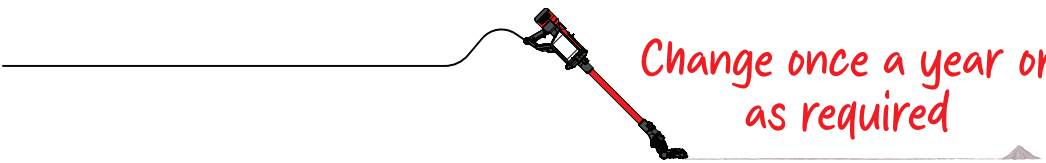

Change once a year or as required

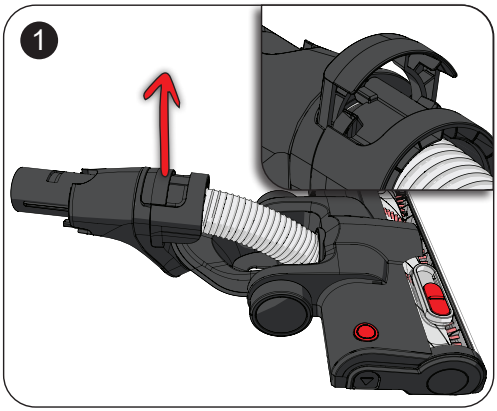

1

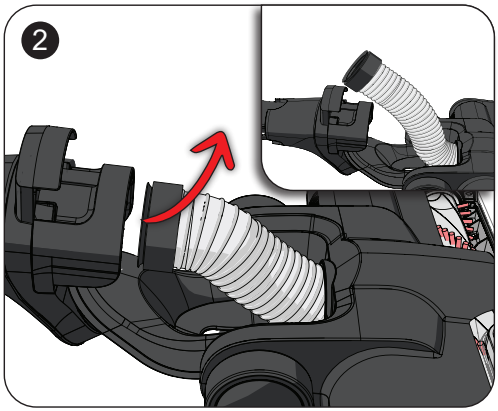

2

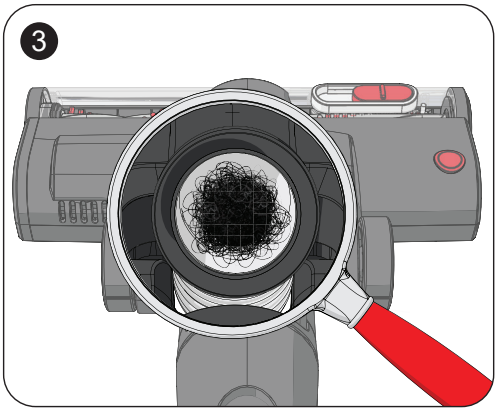
3

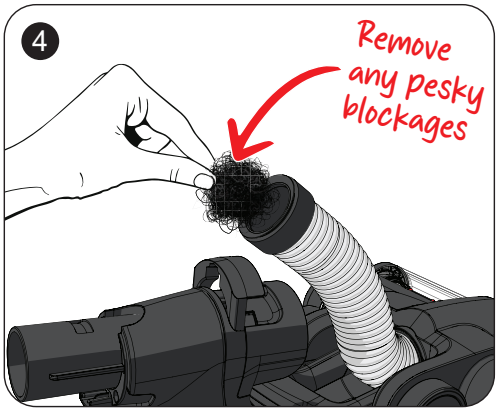
4
Remove any pesky blockages

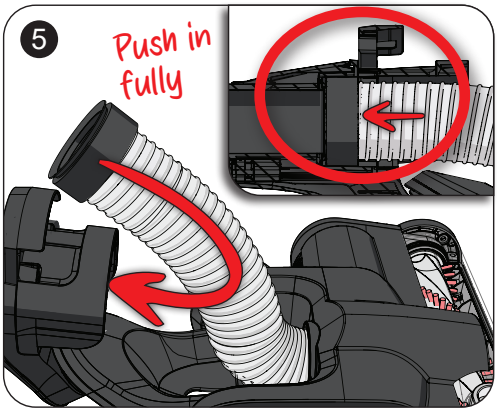

5
Push in fully

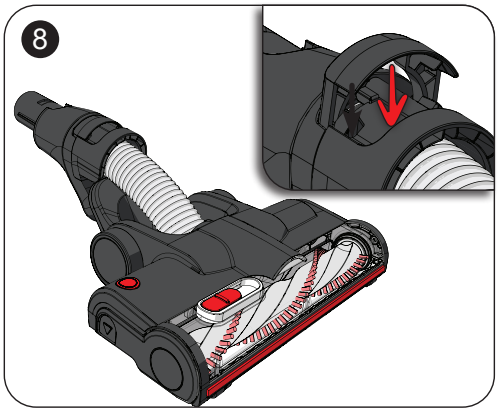
8

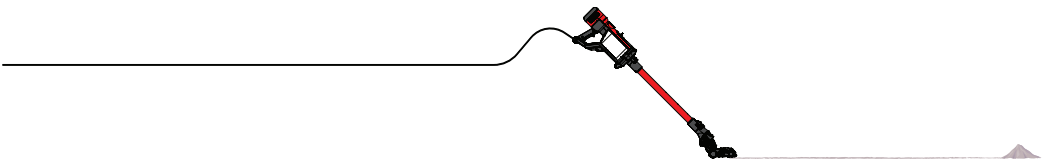


No.	Problem	Possible Reason	Solution
1	Large RED light on control panel is flashing	There is a blockage in the system	Check the floorhead hose, wands, connections and accessories, remove any blockages **Page 12**
		The pod is full	Replace the pod **Page 9**
		The post-motor filter is blocked	Replace the filter **Page 11**
2	Machine is difficult to push on rugs or carpet	The carpet or rug pile is too deep and can cause high pressure on the brush	Open the Floor tool suction control to reduce pressure **Page 8**
			Switch the machine from boost to normal mode **Page 6**
3	Floor head is not picking up hair or fibres	The brush roller is clogged	Remove the roller and clean **Page 10**
		There is a partial blockage in the floor head or wands	Check the floorhead hose and wands, remove any blockages **Page 12**
4	No power at rotating floor brush	The brush head button is switched off	Switch the machine off and then back on again **Page 6**
5	Machine cuts out after prolonged use	Thermal cut out has activated	Allow the machine to cool down
6	Brush roll light gone out and brush roll not spinning	Brush roll is jammed, the safety system cuts power to the brush	Switch off machine, remove and clean brush roller and restart **Page 10**

Failure to rectify the problem or in the event of a breakdown contact your Numatic dealer or the Numatic Technical helpline +44 (0)1460 269268

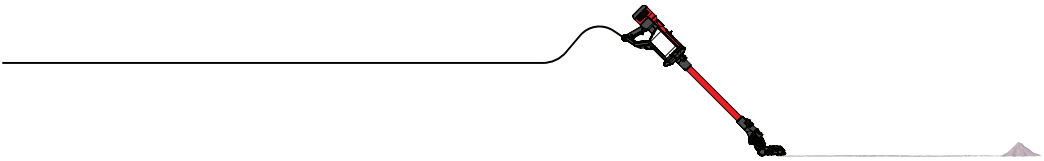


Rating Label

1	Model
2	Machine yr/wk Serial Number
3	Voltage / Alternating Current
4	Frequency
5	Rated Input Power
6	Protection Class 2 Symbol
7	Approval Marks
8	Company Name & Address
9	WEEE Logo
10	Manufacturer
11	Barcode
12	Name & Address of EU importer (Where Applicable)

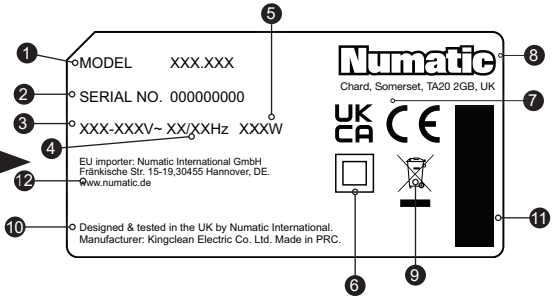

Floor Tool Label

1	Model
2	Part Number
3	Approval Marks
4	WEEE Logo
5	Company Name & Address
6	Voltage / Alternating Current
7	Frequency
8	Rated Input Power
9	Manufacturer
10	Machine yr/wk Serial Number
11	Name & Address of EU importer (Where Applicable)

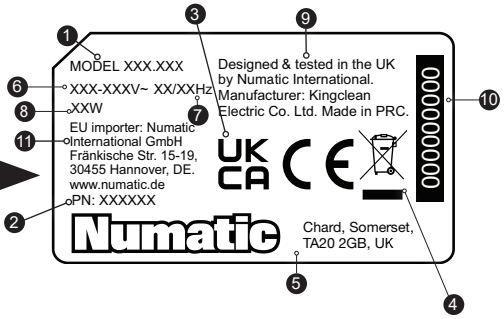


WEEE (Waste, Electrical and Electronic Equipment)
Accessories and packaging should be sorted for environmentally-friendly recycling.



Only for UK/EU countries.
Do not dispose into household waste.
According to the European Directive 2012/19/EU on waste electrical electronic equipment and its incorporation into national law.
Items that are no longer suitable for use must be separated, collected and sent for recovery in an environmentally-friendly manner.

Statement of compliance: We, Numatic hereby declare under our sole responsibility, that the HEC.100 is manufactured in conformity with the following directives: 2014/35/EU Low Voltage Directive, 2014/30/EU EMC Directive, 2011/65/EU RoHS Directive, 2009/125/EC EU/666/2013 Ecodesign Requirements for Vacuum cleaners.

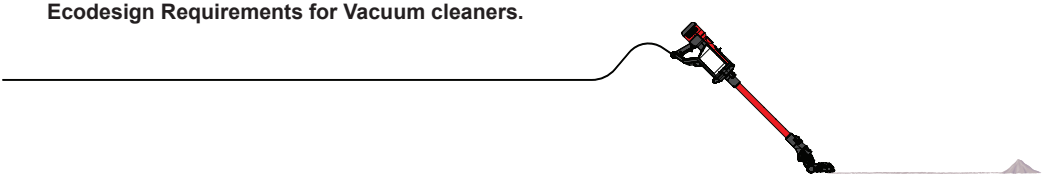

Information for Dry use Vacuum cleaners

Warning

Read the instruction manual before using the machine.
Operators shall be adequately instructed on the use of their machine.
As with all electrical equipment, care and attention must be exercised at all times during use, in addition to ensuring that routine and preventative maintenance is carried out periodically to ensure safe operation. Failure to carry out maintenance as necessary, including the replacement of parts to the correct standard could render this equipment unsafe and the manufacturer can accept no responsibility in this respect.
This machine is for DRY USE only.
This machine is not suitable for picking up hazardous dust.
The machine shall be disconnected from the mains power by removing the plug from the power supply socket during cleaning or maintenance and when replacing parts or converting the machine to another function.
The supply cord cannot be replaced. If the cord is damaged, the appliance should be scrapped.
This appliance is intended to be assembled, cleaned and maintained by an adult.
This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
Children should be supervised to ensure that they do not play with the appliance.
This machine is not a toy; children shall not play with this machine.
This is a general purpose vacuum cleaner suitable for carpet and hard floors.
Ensure the right floor tool is used for the floor type.
Ensure power cord is clear of the floor tool before use, avoid running over power cord to eliminate the risk of damage to power cord and risk of electric shock.
Do not touch the rotating parts. Remove any items (hair, fluff etc.) that might block the brushes and wheels.
CAUTION This machine is for indoor use only. This machine shall be stored indoors only

Do

- Keep your machine clean including hoses and tubes.
- Change the filter pod frequently.
- Keep filters clean
- Keep hoses and tubes clear.
- Replace any worn or damaged parts immediately.
- Regularly examine the power cord. The supply cord cannot be replaced. If the cord is damaged, the appliance should be scrapped.
- Avoid running over the power cord with the floor tool.
- Avoid any action that may crush or damage the power cord in any way.

Don’t

- Use to suck up hot ashes or lighted cigarette ends.
- Immerse in water for cleaning.
- Attempt machine maintenance or cleaning unless the power supply plug has been removed from the supply outlet.
- Allow the supply cord to come into contact with the rotating brushes or pads
- Under any circumstances place foreign objects including (but not limited to) air fresheners, air freshener capsules or scented beads or any other object not originally supplied as part of the machine or OEM accessory pack, into the machine. Doing so can be dangerous and risks damage to the machine and may also invalidate the machine warranty.
- Attempt to replace or repair the power cord if damaged, this is a non-replaceable part.



Voltage	Protection class	Weight (Ready to work)	Cleaning Range
220-240V	Class II	4.19 kg	21m

Pod Capacity	Rated Power	Dimensions L x W x H
1 L	500W	270mm x 240mm x 1220mm


Maintenance

Daily
Keep the machine and all parts clean, including hoses and tubes.
Regularly examine the cable.
Check filter pod frequently and renew if required.
Regularly examine the power cord.


Weekly - as daily and:-
Check for any worn or damaged parts and replace immediately.
Check for blockages
Check post-motor filter
Check brush roll is not clogged and is moving quickly




Notes

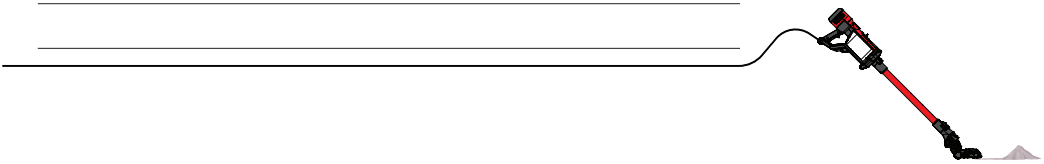

Notes

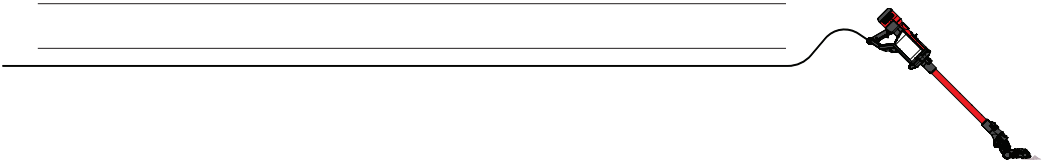

Notes

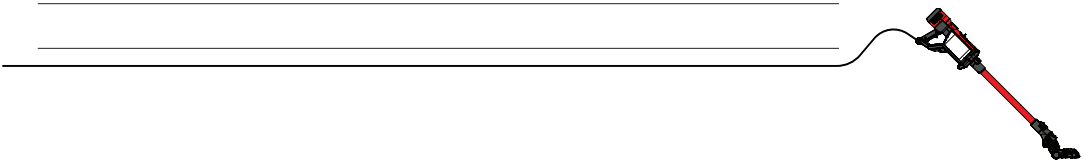

Numatic

numatic.com

Numatic International Limited (Head Office)
Chard, Somerset TA20 2GB, UNITED KINGDOM
Tel: 01460 68600 numatic.com

Numatic International GmbH
Fränkische Straße 15-19, 30455 Hannover, DEUTSCHLAND
Tel: +49 (0) 511 984 2160 numatic.de

Numatic International Denmark
Fränkische Straße 15-19, 30455 Hannover, DEUTSCHLAND
Tel: +45 (0) 316 40808 numatic-online.dk

Numatic International S.A.S
13/17 rue du Valengelier, EAE la Tuilerie, 77500 Chelles, FRANCE
Tel: +33 (0) 164 726 161 numatic.fr

Numatic International BV
Vennootsweg 15, 2404 CG, Alphen aan den Rijn, NEDERLAND
Tel: +31 (0) 172 467 999 numatic.nl

Numatic International Schweiz AG.
Sihlbruggstrasse 3A, 6340 Baar, SCHWEIZ
Tel: +41 (0) 41 768 0760 numatic.ch

Numatic International (PTY) Ltd.
Cnr. 16th & Pharmaceutical Road, Randjes Park, Midrand 1685, SOUTH AFRICA
Tel: +27 (0) 861 686 284 numatic.co.za

Numatic International ULDA
Rua Francisco da Silva Duarte, nº79,
4475-269 Santa Maria de Avioso, Castêlo da Maia, PORTUGAL
Tel: +351 220 047 700 numatic.pt

Numatic International Spain, S.L.U.
Av. Baix Llobregat, 5-7, Oficina bajos 1 (Parc Negocis Mas Blau II),
08820 El Prat de Llobregat (Barcelona) SPAIN
Tel: +34 93 647 22 22 numatic.es

Numatic International Italy S.R.L
Via Luigi Galvani, 2, Z.I. Talponedo, 33080 Porcia (PN), ITALY
Tel: +39 (0) 434 046 211 numatic.it

Specification subject to change without prior notice. All rights reserved.
numatic.com © Numatic International Limited

920840 03/26 (A06)